


SOLID COPPER EARTH RODS

INTERNALLY THREADED



Candour solid copper earth rods are made from 99.9% pure electrolytic copper. Solid copper rods offers greater resistance to corrosion. They are ideally used in applications where soil conditions are very aggressive, for eg. soil with high salt content.

DIMENSION	ROD DIA.	Length	PROD. CODE
16x 1200 or 4'	15 mm	1200 mm or 4'	CI-ER-SC 512
16x1500 or 5'	15 mm	1500 mm or 5'	CI-ER-SC 515
20x 1200 or 6'	20 mm	1200 mm or 4'	CI-ER-SC 520
16x1500 or 5'	20 mm	1500 mm or 5'	CI-ER-SC 521
16x2540 or 10'	20 mm	2540 mm or 10'	CI-ER-SC 1021

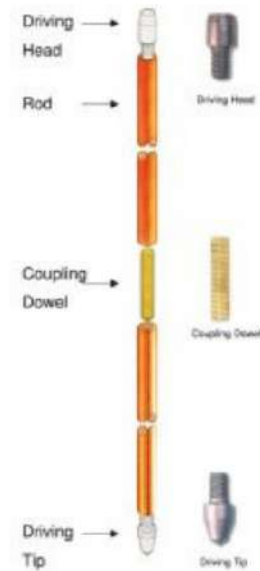

SOLID COPPER EARTH RODS

EXTERNALLY THREADED

Our solid copper earth rods are made from 99.9% pure electrolytic copper. Solid copper rods offers greater resistance to corrosion. They are ideally used in applications where soil conditions are very aggressive, for eg. soil with high salt content.



← Thread Size 'T'

Thread Size 'T' in mm	Length in mm	Product Code
14	1200	CI-ER-SCET - 1412
14	1500	CI-ER-SCET - 1415
5/8"	1200	CI-ER-SCET- 112
5/8"	1500	CI-ER-SCET- 115
3/4"	1200	CI-ER-SCET- 212
3/4"	1500	CI-ER-SCET- 215

* These are UL listed Grounding / Earthing Rods as per UL 467 Standard.

